

W-Mag

One person only can work
when 2 should be needed



W-MAG double magnets : case and end hook.



Sticks to LGS
or a single pipe.



The end hook firmly
sticks to a steel frame.

Unique Magnetic Base

Base magnetic force: 25kg
Special yoke structure and strong large
neodymium magnet
(magnetic flux density 340 mT)

Magnetic End Hook

End Hook magnetic force: 0.9kg
1.2mm thickness. Powerfull twin rare earth
magnets.



Click!

Safety Belt Holder

The quick-fit belt holder enables you to
attach & detach the housing on the
holder with one hand.

Art.Nr.	22 3 4 5 6 7 8	FEATURES	CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
SFG3GLWM25-75E-EUR	25 mm 7.5 m		6	24 (4 SETS)	4975364 122315	3,680 (540/pc)

Tajima

TAJIMA AG
www.tajima.eu.com

Tel +41 41 619 7010
Fax +41 41 619 7011
info@tajima.eu.com
Stansstadterstrasse 54
CH-6370 Stans Suisse

TJM Design Corp.

Tel +81-3-3969-6603
Fax +81-3-3969-7402
3-4-3 Azusawa Itabashi-ku,
Tokyo 174-8503 Japan

Printed in Japan

2020 NEW PRODUCTS

W-THICK LOCK, W-Mag, Japan Pull 265R, JAB-SAW,
DFC670/671, Strong-J Standard, Strong-J Long, Strong-J Grip



Tajima

2020

Special Issue

W-THICK LOCK

The tape that does
NOT FEAR WATER!




Scan the QR code
for more information



W-THICK LOCK performance comparison				
Product	W-THICK LOCK	A	B	C
Tape coating	Nylon (coating)	Nylon (painting)		
Tape length x width	5 m x 25 mm	8 m x 25 mm	5 m x 19 mm	5 m x 16 mm
Tape wear resistance ¹⁾	4 5 6 7 8 1,000 or more reciprocations (Average Reciprocations)	1 8 45 46 47 48 Less than 50 reciprocations	3 4 485 486 Less than 150 reciprocations	484 485 Less than 50 reciprocations
Superior Stand-Out	2.3 m	2.2 m	2.1 m	1.1 m
Rigidity	Front surface 8.2 Back surface 37.2	5.5 26.7	3.9 18.6	1.6 5.1
Hook strength (N) ²⁾	1,503	586	612	909

¹⁾ 1. They let an eraser made of sand go and back on a tape. The number indicates "how many times" an eraser did this action until the scale will be unreadable.
²⁾ 2. This is our own original way of showing how rigid the tape is, not all be bent or warped.
The number indicates the force exactly the moment when tape snaps by being added force.
³⁾ 3. It indicates the maximum strength of the nail by taking it means, you drop Corner (agon-screwed inside) but still the nail will not be broken.

NYLON COATING STRONG TAPE



Printing on tape lasts 7 times
longer than standard tapes.
Extra thick steel for stiffer tape.

STRONG HOOK



Thickness 1.6 mm 4.7 times
stronger than standard
model

Art.Nr.	22 3 4 5 6 7 8	FEATURES	CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
GASP25-50E	25 mm 5.0 m		6	30 (5 SETS)	4975364 122063	2,410 (353/pc)



Japan Pull 265R

Unique fluorine-based coating that reduces friction and protects against rust and corrosion.



FLUORO-COAT
Unique fluorine-based coating that reduces friction and protects against rust and corrosion.

After cutting through 40 mm thick branches, 100 times.




Art.Nr.					CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
JPR265FBR-Y1					6	24	4975364 112538	230
GNB265FBP-1					12	120	4975364 019707	96







JAB-SAW

To make a hole on a plasterboard. Rough cutting on the board.

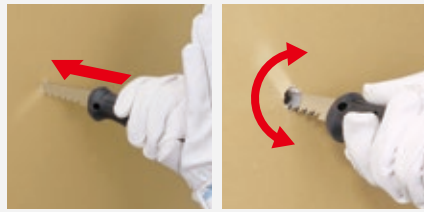

Push it through drywall to make rough cut.



Art.Nr.					CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
N-G165JS-K1	165 mm	3.75 mm	7 TPI	1.8 mm (2.1 mm)	6	24	4975364 112705	143
NK-G165JS-1							4975364 112712	32



DFC670 / 671




Scan the QR code for more information

Fully tempered blade sleeve with multi-function fin end. Can be used for opening tins and prying.



Tempered blade sleeve with fin end

At 1.0mm thick, the hardness of this sleeve is more than double that of existing stainless steel blade sleeves. This sleeve's iconic FIN design is not only durable, it offers additional functionality in opening and prying.

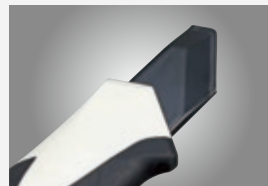

SUPER HARD TIP

The extended blade sleeve holds blade sturdily, preventing blade breakage.



DFC670N-W1
AUTO LOCK

DFC671N-W1
DIAL LOCK

Art.Nr.			BLADE	CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
DFC670N-W1			25 mm	2	60	4975364 112514	203
DFC671N-W1			25 mm	2	60	4975364 112521	230

25^{mm}
BLADE-WIDE

Razor Black Blade *New! Pack of 20 blades.*

Diagram of a single razor blade with dimensions: 25mm width, 14mm length, 60° angle, 1.26mm thickness, and 0.7mm hole diameter. A small image of the razor handle is shown on the right.

SK12
 16g

Art.Nr.		CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
CB66RB-20H-K1		25mm 20 (Spare blade 20)	50 (Spare blade 1,000)	4975364 112090	365



Strong-J Standard

Thick grip shape fully transferring the cutting force to the blade.





Hardened hook convenient to cut, poke and pry. Ultra-hard tempered blade sleeve, 3.5 times stronger than standard models.



Palm fit grip that fits with your hand.



Tether to a lanyard.

Art.Nr.			BLADE	CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
DC610-Y1-10	22 mm	10	ENDURA-BLADE	6	24	4975364 112729	1,720 (233/pc)



Strong-J Long


Long grip of about 180mm for enhanced cutting speed and power.





Elastomer resin grip offering a firm non slip grip with both hands.

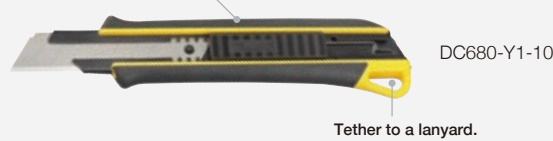

Ultra-hard tempered blade sleeve, 3.5 times stronger than standard models. 1.0mm thick tempered stainless steel blade sleeve. Outstanding blade durability.




Tether to a lanyard.

Art.Nr.			BLADE	CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
DC680-Y1-10	22 mm	10	ENDURA-BLADE	6	24	4975364 112376	1,900 (267/pc)

Strong-J Grip

Use 2 hands to operate while putting all of your strength into cutting process.

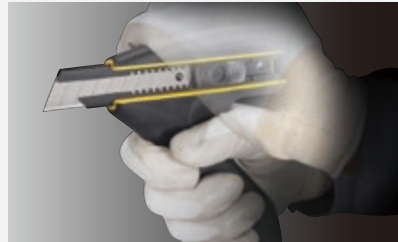



Press down with one hand over the top of knife and grip the handle with the other hand. This will give more control and force when cutting into materials.



1.0mm thick tempered stainless steel blade sleeve. Outstanding blade durability.



Ultra-hard tempered blade sleeve, 3.5 times stronger than standard models.

Art.Nr.			BLADE	CASE	MASTER CARTON	EAN	Weight (g) (Packaging + Product)
DC690-Y1-10	22 mm	10	ENDURA-BLADE	6	24	4975364 112507	2,934 (449/pc)



Non-slip elastomer-grip for secure grip

Tether to a lanyard.